




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01N 21/63, G01M 11/00		A1	(11) International Publication Number: WO 00/37925
			(43) International Publication Date: 29 June 2000 (29.06.00)
(21) International Application Number: PCT/AU99/01028 (22) International Filing Date: 19 November 1999 (19.11.99) (30) Priority Data: PP 7808 18 December 1998 (18.12.98) AU PQ 0126 3 May 1999 (03.05.99) AU (71) Applicant (for all designated States except US): FUTURE FIBRE TECHNOLOGIES PTY LTD [AU/AU]; 20 Viewtech Place, Rowville, VIC 3178 (AU). (72) Inventors; and (75) Inventors/Applicants (for US only): TAPANES, Edward, E. [AU/AU]; 2 Ralton Avenue, Glen Waverley, VIC 3150 (AU). GOODE, Jason, R. [AU/AU]; 4 Spalding Court, Rowville, VIC 3178 (AU). KATSIFOLIS, Jim [AU/AU]; Unit 2/91 Osbourne Street, South Yarra, VIC 3141 (AU). (74) Agent: WILSON, Stephen, Henry; Griffith Hack, Patent & Trade Mark Attorneys, 509 St. Kilda Road, Melbourne, VIC 3004 (AU).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report.	

(54) Title: APPARATUS AND METHOD FOR MONITORING A STRUCTURE USING A COUNTER-PROPAGATING SIGNAL METHOD FOR LOCATING EVENTS

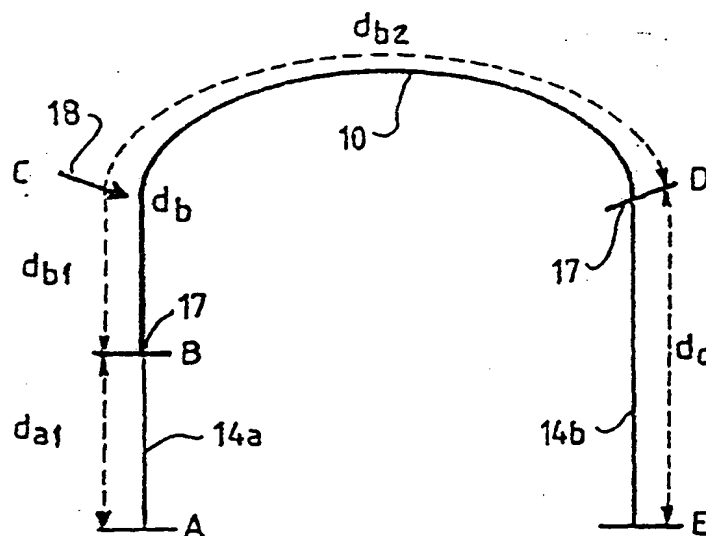

(57) Abstract

An apparatus and method for monitoring a structure such as machines, buildings, fibre optic communication links and infra-structure is disclosed which includes a waveguide (10) and a light source (20) for launching light into both ends of the waveguide (10) so that counter-propagating light signals are produced in the waveguide (10). The waveguide (10) is in the form of an optical fibre or fibre bundle formed from silica and in which the characteristic of the light is modified or effected by an external parameter caused by an event. A detector (30) is provided for detecting light from both ends of the waveguide (10) and for determining the time delay or difference between the modified signals which have been effected by the parameter in order to determine the location of the event along the length of the waveguide (10).

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

APPARATUS AND METHOD FOR MONITORING A STRUCTURE USING A
COUNTER-PROPAGATING SIGNAL METHOD FOR LOCATING EVENTS

FIELD OF THE INVENTION

5

This invention relates to an apparatus and method for
monitoring a structure which employs a waveguide
transmissive counter-propagating signal method and
associated systems for locating events in fibre optic
10 sensing systems.

The term "structure" used in this specification and in the
claims should be understood to mean machines, buildings,
infra-structure such as pipe lines and the like to which
15 the apparatus and method may be applied as well as
waveguides themselves which act as a communication link
for transmission of data from one place to another.

It should also be understood that the term "light" used in
20 the specification and claims means both visible and non-
visible parts of the electromagnetic radiation spectrum.

ART BACKGROUND

25 Optical devices are commonly used in industry and science
and include laser cavities, waveguides, lenses, filters
and other optical elements and their combinations. Such
optical devices are used in a variety of instruments and
installations.

30

Photonics technology has revolutionised the communications
and sensor fields. This is mainly due to the rapid
development of optical and opto-electronic devices. A
wide variety of glass materials, material-dopants and
35 waveguide structures are available and this invention
relates to a waveguide transmissive counter-propagating

signal method and associated systems for locating events in fibre optic sensing systems.

Presently, there is a very high demand for sensors and systems that provide real-time monitoring of the integrity or condition of structures such as machines, buildings and fibre optic communication links. Fibre optic sensors, in particular, are very promising for these applications because of their dielectric properties, their fine size, their ability to be remotely located and, in the case of intrinsic sensors, rapid response times. They also have particular advantages in hazardous environments. In addition, they have several clear advantages over existing conventional sensing techniques such as bulk optical measurements, potentiometric electrodes, resistive foil gauges and piezo-electric transducers.

Engineered structures are usually not monitored in real-time because of the difficulties in incorporating conventional sensors into the sensing environment and because of the limitations of the sensors. Furthermore, conventional sensors are generally point sensing devices, thus requiring a large number of sensors to cover a large area or long length of interest. The subsequent cost and complexity of such a system is most often impractical.

Fibre optic sensors overcome many of these difficulties by virtue of their inherent properties. In addition, optical sensors and optical processing systems are extremely fast and do not suffer from electro-magnetic interference (EMI), unlike their electronic counter-parts. The technology is gaining wide acceptance for monitoring applications and is expected to play a major role in the realisation of real-time structural integrity and machine condition monitoring systems, offering an advanced new generation of engineering sensors.

Fibre optic sensor technology has progressed at a rapid pace over the last decade. Many different sensing techniques have been developed to monitor specific parameters. Different configurations of fibre sensing devices have been developed for monitoring specific parameters, each differing by the principle of light modulation. Fibre optic sensors may be intrinsic or extrinsic, depending on whether the fibre is the sensing element or the information carrier, respectively. They are designated "point" sensors when the sensing gauge length is localised to discrete regions. If the sensor is capable of sensing a measurand field continuously over its entire length, it is known as a "distributed" sensor; "quasi-distributed" sensors utilise point sensors at various locations along the fibre length. Fibre optic sensors can be transmissive or can be used in a reflective configuration by mirroring the fibre end-face. So, fibre optic sensors are actually a class of sensing device. They are not limited to a single configuration and operation unlike many conventional sensors such as electrical strain gauges and piezoelectric transducers.

However, to-date most fibre optic sensor systems are based on point sensing devices, thus again requiring a large number of sensors to cover a large area or long length.

Very few distributed techniques have been developed and are commercially available. Of those that have been developed, fewer still have the capability to actually locate the region or position of the sensed parameter or disturbance along the fibre length; they simply detect, alert and sometimes quantify that an event has occurred.

Methods devised in the prior art for distributed sensing that are capable of locating the position of the sensed parameter include:

- Most current techniques for monitoring fibre optic cable integrity are based on static or slowly varying measurements employing optical time domain reflectometry (OTDR) (ie., sharp bends, fibre fracture, fibre attenuation, connector losses, etc.). This method is essentially based on an optical radar technique, where a very narrow pulse of light launched into an optical fibre is back-scattered or back-reflected by anomalies in the fibre material or structure along its length (ie., fracture, localised compression, fault, etc.) and the measured time-of-flight determines the locations of the anomalies.
- Fibre Optic Distributed Temperature Sensor (DTS) systems have been developed for continuous temperature measurements along the entire length of an optical fibre, and any surface or structure which the fibre is attached to. In the majority of distributed temperature sensing, the ratio of the intensity of the Stokes and anti-Stokes return signals are measured in an optical time domain reflectometry (OTDR) configuration. The end result is a true measurement of the temperature profile along the entire length of the sensor.
- Various OTDR back-scattering techniques for strain and pressure measurements have also been investigated, although no commercial technology is yet available.
- Physical placement of Sagnac interferometer loops at specific locations or geometric configurations have also been used for distributed fibre disturbance detection and location. In a Sagnac interferometer, light is launched into opposite ends of a sensing fibre loop such that two beams circulate through the loop in opposite directions and then recombine to

produce a phase interference pattern on a single photodetector. No use of the time of travel or time delay between the counter-propagating signals is used in these methods.

5

The most common methods for locating events are based on techniques using the back-scattering or back-reflection of extremely narrow pulses of laser light, combined with some other form of sensing mechanism to extract further information about the actual sensed parameter (ie., temperature, strain, pressure, etc.). However, while modern advances in photonics devices have allowed very precise and accurate systems to be developed and commercialised, they are often very complex and expensive. The main reasons for the complexity and high cost of these units is largely in the requirement for very high accuracy and high speed components needed in order to generate extremely narrow pulses of laser light, detect optical signals of extremely low power (often this involves photon-counting and significant averaging of the signals), and provide extremely accurate timing for the time-of-flight measurements of the light pulses.

Owing to the requirement of measuring and averaging the time-of-flight of very narrow, low power pulses, these techniques are often limited to monitoring static or very slowly varying parameters. In addition, to-date most systems based on this principle monitor only temperature. However, they may offer one significant advantage over most other techniques, including that of the present application ; namely, the ability to provide the profile of the sensed parameter along the entire length of the fibre.

Nevertheless, it would be a significant advance to be able to also obtain real-time, quasi-static and dynamic information about any form of disturbance to the optical

fibres, particularly transient events which are too quickly occurring to detect with OTDR techniques. This can be achieved by combining a distributed sensing technique incapable of locating the events with a compatible technique which is capable of locating the events. This would have the further advantage of monitoring any structure or material near the fibre or to which the fibre is attached. Such a capability should enable truly distributed sensing applications such as structural integrity monitoring, pipeline leak detection, ground monitoring, machine condition monitoring and intrusion detection of high security areas.

BRIEF SUMMARY OF THE INVENTION

The object of the present invention is to provide a waveguide transmissive counter-propagating signal method and associated systems for locating events in waveguide sensing systems.

The present invention provides an apparatus for monitoring a structure and for locating the position of an event including;

- a light source;
- a waveguide for receiving light from the light source so that the light is caused to propagate in both directions along the waveguide to thereby provide counter-propagating optical signals in the waveguide, the waveguide being capable of having the counter-propagating optical signals or some characteristic of the signals modified or effected by an external parameter caused by or indicative of the event to provide modified counter-propagating optical signals; and
- detector means for detecting the modified counter-propagating optical signals effected by the parameter and for determining the time delay or difference

between the modified counter-propagating optical signals in order to determine the location of the event.

The present invention relies on the measurement of the time delay or difference between transmissive counter-propagating optical signals affected by the same event. In this novel arrangement, optical signals, preferably continuous-wave (CW) optical signals, are launched, preferably from a single light source, into the waveguide and simultaneously detected by a detector such as two separate photodetectors. Pulsing of the optical signal is not necessary, although it may be employed in some arrangements. Any sensed parameter which acts to alter the counter-propagating signals will effect both signals in the same manner, but because the effected counter-propagating signals must each continue travelling the remainder of the waveguide length to their respective photodetectors there is a resultant time delay or time difference between the detected signals. The time delay is directly proportional to the location of the sensed event along the waveguide length. Therefore, if the time delay or difference is detected and measured, the location of the event can be determined. At the same time, if a compatible sensing mechanism is being employed the sensed event can be quantified and/or identified (ie., strain, vibration, acoustic emission, temperature transient, etc.). In addition, non-sensitive fibre optic delay lines may be connected to the waveguide at either or both ends in order to add additional delay between the transmissive counter-propagating signals and to provide insensitive lead fibres. This may assist engineering the technique into a practical working system.

The invention also has the advantage of operating on virtually any existing type of transmissive distributed fibre optic sensor, enabling dynamic and transient events to be detected, quantified and located anywhere along the

length of the optical fibre which forms the waveguide.
Furthermore, it operates in a transmissive configuration,
thus, delivering substantially the entire optical signal
and power back to the detector and not requiring signal
5 averaging, and it determines the location of events via
the time delay measurement between counter-propagating
optical signals affected by the same disturbance.

10 Examples of non-locating distributed fibre optic sensing
techniques which the present invention could be compatible
with, without imposing any limitations, include:

- Modalmetric interferometers
- Sagnac interferometers
- 15 • Michelson interferometers
- Long-length Fabry-Perot interferometers
- Mach-Zehnder interferometers
- Two-mode interferometers

20 Preferably the waveguide is a silica waveguide.

Preferably the light from the light source is launched
simultaneously into opposite ends of the waveguide.

25 Preferably the light source is a single light source.
However, in other embodiments two CW or synchronised light
sources could be used for launching light simultaneously
into opposite ends of the waveguide.

30 Preferably the waveguide is one or more optical fibres
which forms an event sensitive optical fibre.

Preferably further silica waveguides are connected to the
sensing waveguide at either or both ends in order to add
35 additional delay between the transmissive counter-
propagating signals and to provide insensitive lead
waveguides.

Preferably the detector means comprises:

first and second photodetectors for simultaneously receiving the radiation from the counter-propagating signals in the silica waveguide; and

5 processing means for receiving signals from the first and second photodetectors for determining the time delay or difference between the signals effected from the same disturbance and therefore determining the location of the sensed event.

10

Preferably a waveguide coupler or set of couplers is arranged between the light source and photodetectors and the silica waveguide so that the light can be simultaneously transmitted from the light source to both
15 ends of the silica waveguide and the detector means also being connected to the coupler or couplers so that the counter-propagating transmissive radiation can be directed via the coupler or couplers from the silica waveguide to the detector means.

20

The invention also provides a method for monitoring a structure to locate the position of an event, including the steps of;

launching light into a waveguide so that the
25 light is caused to propagate in both directions along the waveguide to thereby provide counter-propagating optical signals in the waveguide, the waveguide being capable of having the counter-propagating optical signals or some characteristic of the signals modified or effected by an
30 external parameter caused by the event, to provide counter-propagating optical signals; and

detecting the modified counter-propagating optical signals effected by the parameter and for
determining the time delay or difference between the
35 modified signals in order to determine the location of the event.

Preferably the light is launched into both ends of the waveguide to provide the counter-propagating signals.

5 Preferably the light is launched into both ends of the waveguide from a single light source.

The preferred embodiment provides a waveguide transmissive counter-propagating signal method and associated systems for locating events in optical waveguides, which may
10 include:

providing an optical fibre (single or multi moded) formed from a waveguide material designed to simultaneously transmit counter-propagating optical signals;

15 providing a sensor configuration (single or multi moded), with any appropriate waveguide length, any suitable geometry and compatible with the waveguide transmissive counter-propagating signal method and associated systems for locating events in optical
20 waveguides, designed to optimise the sensor sensitivity and detection capabilities;

providing a lead optical fibre (single or multi moded) formed from a waveguide material which acts as an insensitive light guide between the sensing fibre and the
25 sensing and locating system optics and optoelectronics interface;

providing a lead optical fibre (single or multi moded) formed from a waveguide material which acts as an insensitive light guide between the sensing fibre and the
30 excitation source;

fusion splicing, or otherwise connecting, the sensor waveguide and the lead optical fibres so that cores of the waveguides are aligned and remain fixed at the splice;

35 delivering the counter-propagating signals from the waveguide sensor, via the lead optical fibres, to an appropriate optical and electronic arrangement such that

the time delay or difference between the signals may be measured and utilised to determine the location of the sensed event; and

- 5 registering any changes in the waveguide sensor optical signals that may be utilised with a compatible sensing technique, such that the sensed parameter may be quantified and/or identified.

10 The preferred embodiment may also be said to reside in a method for producing a waveguide transmissive counter-propagating signal method and associated systems for locating events in optical waveguides, including, but not limited to, the steps of:

- 15 • Preparing an optical fibre (single or multi moded) formed from a waveguide material designed to simultaneously transmit counter-propagating optical signals.
- 20 • Preparing a sensor configuration (single or multi moded), with any appropriate waveguide length, any suitable geometry and compatible with the waveguide transmissive counter-propagating signal method and associated systems for locating events in optical
- 25 waveguides, designed to optimise the sensor sensitivity and detection capabilities.
- 30 • Preparing a waveguide sensor and optical fibre lead by cleaving or polishing their ends so as to establish a flat, smooth surface. After taking necessary precautions to remove any contaminants from the cleaved or polished waveguide sensor and fibre lead end-faces, the waveguide sensor and fibre lead are placed end-to-end in a fusion splicing apparatus and fused together using the
- 35 appropriate or desired fusion are times and currents. The fusion splicing procedure may be repeated a number of times if necessary. The core and overall diameters of the

waveguide sensor and fibre lead are not limited and translation stages or V-grooves may be used on the fusion splicing apparatus to centrally align the cores of the waveguide sensor and fibre lead before the fusion splicing procedure. Different combinations of waveguide sensor and fibre lead may require a different or unique set of fusion splicing parameters.

- Cleaving or polishing the waveguide sensor at any location after the fusion splice so as to establish a flat, smooth surface. The position of the cleave or polished surface establishes the localised length or sensing region of the sensor. After taking necessary precautions to remove any contaminants from the cleaved or polished waveguide sensor end-face, it is fusion spliced at a desired location to a second fibre lead.

- Preparing or connectorising the free ends of the fibre leads in any manner which facilitates attaching, connecting, splicing or coupling the fibre leads to the appropriate combination and arrangement of light source, couplers, photodetectors and signal processing electronics which achieves the transmissive counter-propagating signal method for locating events in optical waveguides.

- Preferably the manufactured sensor and/or the exposed fusion spliced region(s) may be protected by encapsulating or coating the desired region in a suitable device or material (ie., heatshrink fusion splice protector, acrylate, enamel, epoxy, polyimide, etc.).

30

- In a preferred embodiment the sensor waveguide is a multimode fibre and the lead fibres are singlemode fibres.

- In other embodiments a plurality of multimode fibres and singlemode fibres are fusion spliced in end-to-end relationship to form several sensitive and insensitive regions along the entire fibre assembly.

35

• In other embodiments a plurality of singlemode fibres are fusion spliced to respective multimode fibres and the plurality of singlemode fibres are connected to a coupler which in turn is connected to a further singlemode fibre to form a multiplexed sensor arrangement.

• In an alternate arrangement, the sensor fibre may be replaced by two or more suitably configured optical fibres (single or multi moded) and additional couplers may be utilised to connect the plurality of sensor fibres to the fibre optic leads. In this arrangement, a further number of couplers and photodetectors may be required at the instrumentation to facilitate the increased number of sensing and lead fibres.

• In a preferred embodiment of the above alternate arrangement the sensing part is formed by two suitably configured singlemode fibres and the insensitive leads are singlemode fibres. The two sensing fibres are connected to a lead fibre by the use of a singlemode coupler at either or both ends.

The present invention is effective on any optical waveguiding distributed sensing technique that may be arranged in a transmissive configuration. In a preferred embodiment, but without limitation, the distributed sensing technique is based on a modalmetric technique utilising the fusion splicing of insensitive singlemode fibre to sensitive multimode fibre. In yet another preferred embodiment, but without limitation, the distributed sensing technique is based on a Mach-Zehnder or Michelson interferometer utilising two singlemode fibres as the sensitive region.

Preferably the waveguide comprises at least one optical fibre and/or at least one optical fibre device. In some embodiments of the invention the waveguide may merely

comprise an optical fibre without any additional elements. However, the optical fibre can include passive or active elements along its length. Furthermore, the optical fibre can include sensing elements along its length and those
5 sensing elements can comprise devices which will respond to a change in the desired parameter in the environment of application and influence the properties and characteristics of the electromagnetic radiation propagating in the waveguide to thereby provide an
10 indication of the change in the parameter.

Preferably any suitable CW or pulsed single-frequency or multiple wavelength source or plurality of sources may be employed. In a preferred embodiment, without limitation,
15 a CW or pulsed coherent laser diode is utilised to supply the optical signal. In an alternate arrangement, multiple light sources, of the same or varying wavelengths, may be used to generate the counter-propagating signals. The preferred embodiments of the present invention offer
20 the potential to utilise all-fibre, low-cost optical devices in conjunction with laser diodes, light emitting diodes, photodetectors, couplers, isolators, circulators and filters. Any suitable light source, coupler and photodetector arrangement may be used with the sensor and
25 locating systems. In a preferred embodiment, the required optical properties of the light source are such that light may be launched into and propagated in the singlemode waveguide. For localisation, the light propagated in a singlemode fibre must remain singlemoded during the entire
30 period of travel in the singlemode fibre. Once the light is launched into the multimode fibre from the singlemode fibre, several modes may be excited and the multimoded fibre will be sensitive to various parameters. Once the light is launched back into the singlemode fibre from the
35 multimode fibre, only a single mode is supported and travels to the optical components of the system. Lead-in/lead-out fibre desensitisation and sensor localisation

is achieved in this manner. In practical applications, the singlemode fibre should be made sufficiently long to attenuate all cladding modes in order to improve the signal-to-noise ratio. This preferred embodiment applies
5 for both directions of travel of the transmissive counter-propagating optical signals.

Utilisation of properties and characteristics of the electromagnetic radiation propagating in the waveguide
10 sensor enables monitoring to take place in a non-destructive manner. Thus, the sensor is not necessarily damaged, fractured or destroyed in order to monitor and locate the desired parameter.

15 In the method, according to the preferred embodiment of the invention, electromagnetic radiation is launched into an optical waveguide (single or multi moded), such as an optical fibre, from a light source, such as a pigtailed laser diode, fibre laser or light emitting diode, and
20 propagates along the optical waveguide. The optical waveguide is connected (temporarily or permanently) to one arm of an optical waveguide light splitter or coupler and when the electromagnetic radiation reaches the light splitter the electromagnetic radiation can branch out into
25 the two output waveguide arms of the light splitter. Each of the output arms of this light splitter are fusion spliced to other couplers, thus the optical radiation from the laser source is simultaneously launched into each of the other two couplers. These two couplers form the
30 launch and detection ports for the dual-ended, counter-propagating method described above. The optical signal is simultaneously launched to the output waveguide arms of the couplers. Only one output arm is used in each
35 coupler, the other is fractured or otherwise terminated to avoid back-reflections. The output arms of the couplers are either connected (temporarily or permanently) directly to the waveguide sensing element or to a lead optical

waveguide which is connected (temporarily or permanently) to the waveguide sensing element. Any one of the output waveguide arms of the light splitter may be used to deliver the electromagnetic radiation to the sensor waveguide via an optical waveguide lead. Likewise, a plurality of output waveguide arms may be used to deliver the electromagnetic radiation to a number of individual or multiplexed waveguide sensors. Each of the counter-propagating signals transmitted into the waveguide sensor propagates along the entire length of the waveguide until they reach the opposite ends and are launched back into the latter couplers in the opposite direction to the initial launch signals. The signals are each split in the reverse direction through the latter couplers. Part of the signals travel back towards the first coupler and laser, and the remainder of the signals travel along the unused arms of the latter couplers, which are terminated at photodetectors. The optical signals are simultaneously monitored by the two photodetectors. Appropriate electronics, signal processing schemes and algorithms process the signals from each detector and provide the location of the sensed event by determination of the time delay or difference between the signals effected by the same disturbance. The insensitive fibre optic leads may be very long to provide an additional time delay between the optical signals. This may assist engineering the technique into a practical working system.

In the method, according to an alternate preferred embodiment of the invention, the sensing section is formed by two or more suitably configured fibres (single or multimoded) and the insensitive leads are singlemode fibres. The plurality of sensing fibres are connected to the lead fibres by the use of additional singlemode couplers at either or both ends of the sensing fibres.

Preferably the instrument optical and electronic arrangements will utilise noise minimisation techniques.

Preferably, all the optical and electrical components will
5 be located in a single instrument control box, with individual optical fibre input ports.

Electro-optic devices, acousto-optic devices, magneto-optic devices and/or integrated optical devices may also
10 be utilised in the system.

The invention provides an apparatus for monitoring an optic fibre communication link into which data signals are launched and from which the data signals are received, and
15 for locating the position of a disturbance to the link including;

a light source for launching light into the link so that the light is caused to propagate in both directions along the link to thereby provide counter-propagating optical signals in the link, the link being
20 capable of having the counter-propagating optical signals or some characteristic of the signals modified or effected by the disturbance to provide modified counter-propagating optical signals; and

25 detector means for detecting the modified counter-propagating optical signals and for determining the time delay or difference between the modified counter-propagating optical signals in order to determine the location of the disturbance.

30

The invention still further provides a method for monitoring an optical fibre communication link into which data signals are launched and from which the data signals are received, to locate the position of a disturbance to
35 the link, including the steps of;

launching light into the link so that the light is caused to propagate in both directions along the link

to thereby provide counter-propagating optical signals in the link, the link being capable of having the counter-propagating optical signals or some characteristic of the signals modified or effected by the disturbance to provide
5 counter-propagating optical signals; and

detecting the modified counter-propagating optical signals effected by the disturbance and for determining the time delay or difference between the modified signals in order to determine the location of the
10 disturbance.

BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the present invention will be
15 further illustrated, by way of example, with reference to the following drawings in which:

Figure 1 is a view showing a general embodiment of the invention;

Figure 2 is a view showing an embodiment of the
20 invention, utilising a modalmetric sensing technique;

Figure 3 is a view showing a further embodiment of the invention, utilising a Mach-Zehnder interferometric sensing technique;

Figure 4 shows an integrated fibre optic sensing
25 and communication system, utilising a modalmetric sensing technique;

Figure 5 is a view showing yet a further embodiment of the invention;

Figure 6 is an oscilloscope plot illustrating
30 the actual response of a system formed by the method of a preferred embodiment of the present invention, as detailed in Figure 5, when a perturbation acts on the fibre of a 14.71 km fibre link;

Figure 7 is another oscilloscope plot
35 illustrating the actual response of a system formed by the method of a preferred embodiment of the present invention,

as detailed in Figure 5, when a perturbation acts on the fibre of a 14.71 km fibre link; and

Figure 8 shows a combined fibre optic sensing and communication arrangement, utilising a modalmetric sensing technique and the ability to locate disturbances formed by the method of the preferred embodiments of the present invention;

Figure 9 is a view of a further embodiment of the invention; and

Figure 10 is a view of a still further embodiment of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

With reference to Figure 1, a general set-up is illustrated where the distributed sensor 10 may be preceded and succeeded by certain arbitrary lengths of insensitive fibre leads 14a and 14b. It is important to emphasise that neither one or both of the insensitive fibre leads 14a and 14b are required for the methodology; they simply provide additional optical delay lines in order to add additional delay between the transmissive counter-propagating signals, to provide insensitive lead fibres and/or to facilitate specific placement of the sensing region(s). This may assist engineering the technique into a practical working system. The insensitive leads 14a and 14b may be fusion spliced 17, or otherwise connected, to the sensing fibre 10.

The optical fibre link (total distance d_x) is made up of an insensitive section 14a, of length d_a , fusion spliced 17 to a sensitive section 10, of length d_b , and finally fusion spliced 17 again to a third insensitive section 14b, of length d_c . The aim of the set-up is to locate a disturbance 18 (at point C) along the sensitive section of the fibre link 10 (between points B and D).

By injecting laser light into both points A and E simultaneously, the fibre link has two counter-propagating

light beams. A perturbation 18 anywhere along the sensitive part of the fibre link 10 will cause two identical perturbation signals each to propagate in alternate directions; that is, from point C towards point E, and from point C towards point A. If the difference in time of arrival of each signal (respectively at points A and E) is known, then the point along d_b at which the disturbance occurred can be calculated using the following equations:

$$\begin{aligned} d_x &= d_a + d_b + d_c \\ &= d_a + d_{b1} + d_{b2} + d_c \end{aligned} \quad (1)$$

The difference in time of arrival of each signal (respectively at points A and E), Δt , is given by:

$$\Delta t = (\Delta t_{b2} + \Delta t_c) - (\Delta t_{b1} + \Delta t_a) \quad (2)$$

where Δt_a , Δt_{b1} , Δt_{b2} , Δt_c , refer to the time taken for an optical signal to travel along d_a , d_{b1} , d_{b2} , and d_c , respectively, and can be calculated for known distances using $t = d/v$, where v is the speed of the optical signal given by c/n_{fibre} , where c is the speed of light in a vacuum (3×10^8 m/s) and n_{fibre} is the effective refractive index of the optical fibre.

Rewriting the equation for Δt , we have:

$$\Delta t = \frac{d_{b2} + d_c - d_{b1} - d_a}{v} \quad (3)$$

Using the equation for d_x we can substitute $d_{b2} = d_x - d_a - d_c - d_{b1}$, giving:

$$\begin{aligned} \Delta t &= \frac{d_x - d_a - d_c - d_{b1} + d_c - d_{b1} - d_a}{v} \\ &= \frac{d_x - 2d_a - 2d_{b1}}{v} \\ &= \frac{d_x - 2(d_a + d_{b1})}{v} \end{aligned} \quad (4)$$

Therefore, the point of disturbance referenced from point A is given by:

$$\text{Point of disturbance}_A = (d_a + d_{b1}) = \frac{d_c - (v\Delta t)}{2} \quad (5)$$

Similarly, the point of disturbance referenced from point E is given by:

$$\text{Point of disturbance}_E = (d_c + d_{b2}) = \frac{d_c + v\Delta t}{2} \quad (6)$$

10

It is interesting to note that this result illustrates that it is required to only know the length of the entire fibre link, d_x , and not the respective lengths of the various sensitive and insensitive fibre regions in the system. This information can be easily obtained at the design and installation stages of a project, or post-installation by the use of an OTDR. Then, once the total length is known and the time delay, Δt , is measured by the system, it is a straight forward calculation using Equations 5 or 6 to determine the location of the sensed event.

In the embodiment of Figure 2, CW coherent laser light is launched into a singlemode optical fibre 15, from a pigtailed laser diode 20 and fibre isolator 22, and propagates along the optical fibre 15. The optical fibre 15 is fusion spliced 41 to one arm of a singlemode fibre optic coupler 24 and when the light reaches the coupler 24 the light can branch out into the two output arms of the coupler 24. Each of the output arms of this coupler 24 are fusion spliced 42a and 42b to other singlemode fibre couplers 26a and 26b, respectively, thus the light from the laser source 20 is simultaneously launched into each of the other two couplers 26a and 26b. These two couplers 26a and 26b form the launch and detection ports for the dual-ended, counter-propagating method utilising a modalmetric sensing technique. The optical signal is

simultaneously launched to the output arms 27a and 27b of the couplers 26a and 26b. Only one output arm 27a and 27b from each coupler 26a and 26b, respectively, is used, all other unused arms of couplers are fractured or otherwise terminated to avoid back-reflections 19. The output arms 27a and 27b of the couplers 26a and 26b are terminated at singlemode fibre optic bulkhead connectors (through adaptors) 28a and 28b. A connectorised singlemode fibre lead 14a is connected to the through adaptor 28a, such that the light from coupler 26a is launched into the fibre link in one direction. Similarly for the counter-propagating signal, a connectorised singlemode fibre lead 14b is connected to the through adaptor 28b, such that the light from coupler 26b is launched into the fibre link in the opposite direction. The singlemode fibre lead 14a is fusion spliced 43 to one end of the multimode sensing fibre 10 and the singlemode fibre lead 14b is fusion spliced 44 to the opposite end of the multimode sensing fibre 10, thus forming the transmissive counter-propagating sensing loop configuration required. Each of the counter-propagating signals transmitted through the fibre sensor 10 propagates along the entire length of the fibre link until they reach the opposite ends and are launched back through leads 14a and 14b and bulkhead through adaptors 28a and 28b into the couplers 26a and 26b, respectively, in the opposite direction to the initial launch signals. The signals are each split in the reverse direction through couplers 26a and 26b. Part of the signals travel back towards the first coupler 24 and laser 20, and the remainder of the signals travel along the arms 16a and 16b of the latter couplers 26a and 26b, respectively, which are terminated at photodetectors 30a and 30b. The fibre isolator 22 is used to reduce the amount of light launched back into the laser diode. The optical signals are simultaneously monitored by the two photodetectors 30a and 30b. Appropriate electronics, signal processing schemes and algorithms process the

signals from each detector 30a and 30b and provide the location 18 of the sensed event by determination of the time delay or difference between the signals effected by the same disturbance. The insensitive fibre optic leads 5 14a and 14b may be very long to provide an additional time delay between the optical signals, if required.

In the embodiment of Figure 3, CW coherent laser light is launched into a singlemode optical fibre 15, from a 10 pigtailed laser diode 20 and fibre isolator 22, and propagates along the optical fibre 15. The optical fibre 15 is fusion spliced 41 to one arm of a singlemode fibre optic coupler 24 and when the light reaches the coupler 24 the light can branch out into the two output arms of the 15 coupler 24. Each of the output arms of this coupler 24 are fusion spliced 42a and 42b to other singlemode fibre couplers 26a and 26b, respectively, thus the light from the laser source 20 is simultaneously launched into each of the other two couplers 26a and 26b. These two couplers 20 26a and 26b form the launch and detection ports for the dual-ended, counter-propagating method utilising a Mach-Zehnder interferometric sensing technique. The optical signal is simultaneously launched to the output arms 27a, 27c and 27b of the couplers 26a and 26b. Only one output 25 arm 27b from coupler 26b is used, all other unused arms of couplers are fractured or otherwise terminated to avoid back-reflections 19. The output arms 27a, 27c and 27b of the couplers 26a and 26b are terminated at singlemode fibre optic bulkhead connectors (through adaptors) 28a, 30 28c and 28b. Connectorised singlemode sensing fibres 10a and 10c are connected to the through adaptors 28a and 28c, respectively, such that the light from coupler 26a is simultaneously launched into the fibre link in one direction. Alternately, a further coupler could be used 35 with arms 10a and 10c to replace using arm 27c and adaptor 28c. Similarly for the counter-propagating signal, a connectorised singlemode fibre lead 14 is connected to the

through adaptor 28b, such that the light from coupler 26b is launched into the fibre link in the opposite direction. The singlemode sensing fibres 10a and 10c are fusion spliced 45 and 46, respectively, to one end of a
5 singlemode coupler 60 and the singlemode fibre lead 14 is fusion spliced 47 to one arm of the coupler 60 on the opposite side, thus forming the transmissive counter-propagating sensing loop configuration required. The unused arm of coupler 60 is fractured or otherwise
10 terminated to avoid back-reflections 19. Each of the counter-propagating signals transmitted through the fibre arrangement propagates along the entire length of the fibre link until they reach the opposite ends and are launched back through bulkhead connectors 28a, 28c and 28b
15 into the couplers 26a and 26b, respectively, in the opposite direction to the initial launch signals. The signals are each split in the reverse direction through couplers 26a and 26b. Part of the signals travel back towards the first coupler 24 and laser 20, and the
20 remainder of the signals travel along the arms 16a and 16b of the latter couplers 26a and 26b, respectively, which are terminated at photodetectors 30a and 30b. The fibre isolator 22 is used to reduce the amount of light launched back into the laser diode. The optical signals are
25 simultaneously monitored by the two photodetectors 30a and 30b. Appropriate electronics, signal processing schemes and algorithms process the signals from each detector 30a and 30b and provide the location 18 of the sensed event by determination of the time delay or difference between the
30 signals effected by the same disturbance. The insensitive fibre optic lead 14 may be very long to provide an additional time delay between the optical signals, if required.

35 Figure 4 illustrates an integrated fibre optic sensing and communication system, utilising a modalmetric sensing

technique, and is described in detail in the example further below.

Figure 5 illustrates a view of an embodiment of the invention used to verify the feasibility of the invention, and is described in detail in the example further below. Figure 6 illustrates an oscilloscope plot illustrating the actual response of a system formed by the method of a preferred embodiment of the present invention, as detailed in Figure 5 and the example further below, when a perturbation acts on the fibre of a 14.71 km fibre link. Figure 7 illustrates another oscilloscope plot illustrating the actual response of a system formed by the method of a preferred embodiment of the present invention, as detailed in Figure 5 and the example further below, when a perturbation acts on the fibre of a 14.71 km fibre link.

Figure 8 illustrates a combined fibre optic sensing and communication arrangement, utilising a modalmetric sensing technique and the ability to locate disturbances formed by the method of the preferred embodiments of the present invention. In a practical application of this technique, it will usually be desirable for both launch points of the counter-propagating signals to be at the same physical location. This is easily achieved by using a multi-fibre cable which will effectively form a single-ended system. In this arrangement, one singlemode fibre is utilised as the communications fibre, whilst two fibres, one singlemode and one multimode, are required to set-up the modalmetric intrusion sensor (event detection and location determination) over the specified region of interest (shaded area). A perturbation anywhere along the multimode fibre in the shaded region will generate two counter-propagating perturbation signals. Measuring the time difference in their respective time of arrival at the

transmitter end of the link will allow the location of the disturbance to be determined.

With reference to Figure 8 a communication cable 150 is shown which includes a communications fibre 151. One end of the fibre 151 is connected to a transmitter 152 and the other end to a receiver 153. The transmitter 152 transmits data into the fibre 151 for receipt by the receiver 153.

The cable 150 also includes a multimode fibre 155 which is spliced to a single mode fibre 156 at splice point 157. A further single mode fibre 158 is spliced to the multimode fibre 155 at 159. The fibres 155, 156 and 158 are formed in a loop configuration within the cable 150 so that the ends 160 and 161 of the continuous fibre formed by the fibres 155, 156 and 158 are adjacent one another.

As previously explained, counter-propagating signals are launched into the two ends 160 and 161 of the fibres 155, 156 and 158 and detectors (not shown) are arranged for detecting the two counter-propagating signals which emanate from the two ends 160 and 161.

Any attempt to break into the cable 150 to physically access fibre 151 will necessarily disturb the multimode fibre 155 which is the sensing fibre and therefore the two counter-propagating perturbation signals will be produced and detected at the ends 160 and 161 in the manner previously described. By determining the time differential between the receipt of the two modified or perturbation signals the location of the attempted break-in can be determined.

Although in the preferred embodiment shown in Figure 8 the fibres 155, 156 and 158 loop back on one another so the two ends 160 and 161 are adjacent one another, it would be

possible to provide a single sensing multimode fibre which runs generally parallel with the fibre 151 and launch light into both ends of the fibre from opposite ends of the cable 150 and also detect light from both ends and
5 synchronising the photodetectors so as to obtain the time differential to locate the position of the attempted break-in.

EXAMPLES OF THE PREFERRED EMBODIMENTS

10

Preferred embodiments of the present invention have been tested illustrated by the following example. The optical fibre transmissive counter-propagating signal method and associated system was constructed in order to demonstrate
15 the feasibility of producing the invention described herein. Not all of the results obtained to date are detailed in the following example.

Example: Location of Point of Disturbance Using the 20 Modalmetric Effect:

It has long been known that when a multimode optical fibre is disturbed, the distribution of the modes is affected. This modulation of the modal distribution in a multimode
25 fibre is known as the modalmetric effect. The modalmetric effect in a multimode fibre can be used to sense and monitor vibrations, disturbances or movement of the fibre itself, or any structure or object the fibre is attached to, by detecting an intensity change in the speckle
30 pattern output of the fibre. Modalmetric sensors can therefore be used as vibration sensors in structural monitoring, condition monitoring of high voltage equipment, intrusion detection of cables or pipelines, and in fence perimeter security.

35

Initially, optical fibres were deployed mainly in long-haul and high-speed telecommunication systems. However,

with the decrease in cost of optical fibre cable, and optoelectronic sources and detectors, optical fibres are now being used as the main carrier in many other communications applications such as, LAN/WAN backbones, and in the private communications networks of many small and large organisations (ie., banks, defence, government, public utilities and multinationals). Many of these communications networks involve the transfer of sensitive information which has made the security of the communications link a high priority.

The modalmetric effect can easily and effectively be employed to guard against any intrusion into or tampering with an optical fibre cable. A typical set-up where the sensing is integrated into a fibre communications system is shown in Figure 4.

Both the sensing system 100a (i.e. laser) and 100b (detector and processor) and the communication system 200a (transmitter) and 200b (receiver) are integrated into the same optical fibre 10. The wavelength of the sensing system is chosen so as not to interfere with the communications signal (via wavelength multiplexing) and also such that the fibre link is multimoded for the sensing wavelength. Several other configurations are possible, however, they all work on the same principle. The modalmetric processing unit will detect any perturbation at any point along the fibre link.

Up until now, the modalmetric sensing effect has only had the capability of sensing disturbances along a distributed multimode optical fibre sensing length, without being able to locate the exact point of the disturbance. Recent experiments by the inventors have shown that it is now possible to locate the disturbance by determining the time delay between two counter-propagating signals, according to the method of the invention described herein. The

experimental work is described below for the arrangement illustrated in Figure 5.

The set-up described in Figure 5 is similar to that in Figure 1, with two counter-propagating light signals A¹ and B¹ in the fibre link. Again, the sensing fibre 10 (which may be for example 2km long and located between splicing points 105 and 107) may be a dedicated fibre in the fibre cable, or the same fibre as the communications fibre. The fibre 10 is connected to insensitive lead fibres 109 and 111 which form the ends of the waveguide network. The lead fibre 109 is connected to an insensitive fibre 113 of significant length (such as 5km) via splice 115 and the fibre 113 is spliced at 117 to a sensitive multi-mode fibre 119 via splice 117. The fibre 119 is connected to the fibre 10 via splice 107. The fibre 119 may be of significant length such as 8.8km. If a perturbation P is applied to the multimode fibre at the point indicated (point A), two similar or identical time varying optical signals will be generated consistent with the modalmetric effect, each travelling in the opposite direction. The perturbation signal consistent with Input 1 (PS1) will arrive at Port 2 (Output 1) before the perturbation signal consistent with Input 2 (PS2) arrives at Port 1 (Output 2). This is due to the fact that PS2 needs to propagate through for example 14.71 km (the difference in distance between A to Port 1 and A to Port 2) more optical fibre than PS1. By measuring the time delay between the two perturbation signals, the location of the disturbance can be calculated. In the above set-up, assuming a refractive index for the fibre of 1.457, then the time difference between the two signals can be calculated as:

$$\Delta t = \frac{14.71 \times 10^3 \text{ m}}{(3 \times 10^8 \text{ m/s}) / (1.457)} = 71.49 \mu\text{s}$$

Several measurements were performed on a transmissive counter-propagating fibre arrangement described in Figure 5. An experimental set-up the same as that detailed in Figure 2 was used to measure the perturbation signals and a Hewlett Packard 54810A Infinium digitising oscilloscope was used to sample the perturbation signals and manually measure the resultant time difference. Figures 6 and 7 illustrate results from two such data captures. As can be seen from both captures, there is clearly a delay between the two perturbation signals, which has been measured as 65 μ s and 70 μ s respectively, comparing well with the theoretical calculation of 71.5 μ s. The error (effectively 300 m) may be a result of the assumption of the value of the effective refractive index of the fibres and by the inaccuracy in the manual measurement of the time delay. These errors could be reduced by knowing the actual effective refractive index of the fibre and by employing digital signal processing means to accurately determine the time delay.

Figures 9 and 10 show further embodiments of the invention in which a common waveguide is used for both transmission of data (for example a fibre communication link) and also forms the sensing fibre for determining any attempt to interfere with the fibre. These embodiments has particular application to securing communication links and indicating any attempt to break into the communication link so as to tap off data from the communication link. Figure 10 shows a loop configuration and Figure 9 a configuration without a loop.

In Figure 9 an optical fibre 200 forms the communication link for transmitting data from one place to another. The fibre 200 is preferably single moded at a wavelength of 1550 nm (which will be the data transmission wavelength) and multimoded at a wavelength of 850 nm (which will be the sensing frequency). Data is launched into the fibre

200 from a transmitter 210 which may include a pigtailed laser diode with an integrated isolator so that data signals are launched into a single moded fibre 212 at the wavelength of 1550 nm. The fibre 212 is spliced at 213 to
5 fibre 214 which is connected to one arm of a coupler 216. The output of the coupler 216 is spliced at 218 to the fibre 200. The fibre 200 is also spliced at 218 to a coupler 220. One of the arms of the coupler 220 is spliced to a single moded fibre 221 which is spliced at
10 222 to a further single mode fibre 224. The fibres 221 and 224 are single moded at the wavelength of 1550 nm. The fibre 224 is connected to a detector 226 which is sensitive to the wavelength of 1550 nm.

15 A first counter-propagating sensing system 240 is connected to the other arm of the coupler 216 by a single mode fibre 241 and a multi-mode fibre arm 242 of coupler 216 which are spliced together at splice 243. The fibres 241 and 242 are single moded and multi-moded respectfully
20 at a wavelength of 850 nm which is the sensing wavelength used in the embodiment of Figure 9. The counter-propagating sensing system 240 includes a transmitter such as a pigtailed laser diode for launching the light at the wavelength of 850 nm into the fibre 241, and a detector
25 for detecting light emanating from the fibre 241 in the manner which will be described hereinafter. The system 240 can be identical to the pigtailed laser diode 20 and detector 30a described with reference to Figure 2. The system 240 may include appropriate couplers for enabling
30 light to be launched into the fibre 241 from the pigtailed laser diode and to enable the detector to receive light from the fibre 241. Thus, the sensing light signal is launched into the fibre 241 from the counter-propagating system 240 at a wavelength of 850 nm and is coupled with
35 the data transmission signal from the transmitter 210 in the coupler 216. Both the data transmission signal at a

wavelength of 1550 nm and the sensing signal at a wavelength of 850 nm travel through the fibre 200.

The coupler 220 has a second arm which is connected to multi-mode fibre 249 which is spliced at 250 to a further single mode fibre 251. The fibres 249 and 251 are respectively multi moded and single moded at the wavelength of 850 nm. The fibre 251 is connected to a counter-propagating sensing system 260 which is identical to the system 240. Thus, the system 260 both launches and receives sensing light signals at a wavelength of 850 nm or 670 nm into the fibres 251 and 249 for counter propagation in the fibre 200 to the signals which are launched by the system 240.

The data signal at a wavelength of 1550 nm which travels along the fibre 200 is coupled into the fibres 221 and 224 by the coupler 220 with some of the 850 nm signal. The detector 226 detects only the signal at the wavelength of 1550 nm and therefore the data which is transmitted from the transmitter 210 and is InGaAs. Retractors in systems 240 and 250 are Si type and only sensitive to the 850 nm or 670 nm wavelengths.

The counter-propagating sensing signals which are launched by the systems 240 and 260 travel in opposite directions along the fibre 200 which is multi moded at the wavelengths of 850 nm or 670 nm. Thus, the multi moded fibre 200 forms a sensitive fibre along its entire length because it is multi moded at the wavelength of 850 nm or 670 nm and therefore any attempt to break into the fibre 200 so as to tap off data from the fibre 200 will cause a change to the light signal at the wavelength of 850 nm or 670 nm launched into the fibre 200 so that modified counter-propagating signals which are modified due to the disturbance caused by the attempted break in are received by the detectors in each of the systems 240 and 260. The

location of the attempted break in can be determined in the manner described in the previous embodiments by determining the time difference between the receipt of the modified signals in the system 240 and the system 260 so
5 that the position along the length of the fibre 200 can be determined.

The detectors in the systems 240 and 260 are suitably timed synchronised with one another so that the difference
10 in time between the receipt of the modified signal in the system 240 and receipt of the modified signal in the system 260 can be determined.

Figure 10 shows a further embodiment which is similar to
15 the embodiment of Figure 9 except that rather than having two counter-propagating sensing systems 240 and 260 a single system 270 is utilised and a return loop fibre 271 is coupled to the coupler 220 so that the fibre 200 is effectively looped back to a single system 270 in the same
20 manner as described with reference to Figures 2, 3, 5 and 8. The fibre 271 is single moded at the sensing wavelength so that it is insensitive and therefore any attempt to break into the fibre 200 will cause the modification to the counter-propagating signals launched
25 into the fibre 200 but disturbance of the fibre 271 will not cause any modification to signals in the fibre 271 so that the point of attempted break in in the fibre 220 can be detected.

30 In this embodiment the counter-propagating signals are launched from the system 270 into the fibre 241 and also the fibre 271 for counter propagation along the fibre 200 concurrently with the data signal launched from the transmitter 210. The data signal is received by the
35 detector 226 in the same manner as described with reference to Figure 9. This embodiment has the advantage of locating the detectors for detecting the counter-

propagating signals at the same place thereby avoiding the need for remote synchronising of detectors which are at different locations as in the embodiment of Figure 9.

5 In the preferred embodiments of the invention the modified signals which are detected by the detectors are any parameter of the light signals which is altered by the disturbance to the sensing fibre. The parameter may be the intensity of the signal so that the detectors for
10 detecting the counter-propagating signals effectively look at the intensity of the signal which is received and when the intensity changes this is indicative of the receipt of the modified signal caused by the disturbance to the sensing fibre.

15

APPLICATIONS OF THE PREFERRED EMBODIMENTS

Optical devices and systems made by the method of the invention are useful in a wide variety of applications and fields. Not inclusive, but indicatively, the following
20 examples illustrate some potential users of the fibre optic sensing and locating methods described herein:

- Road, rail, dam and bridge maintenance firms.
- Owners, operators and insurers of infrastructure.
- 25 • Pipeline construction companies, contractors and operators.
- Petroleum and petrochemical companies.
- Offshore oil rig operators and maintenance firms.
- Perimeter fence or wall security firms.
- 30 • Security firms.
- Government and military organisations.
- Power generation and distribution industry.
- Power, water and fuel facilities.
- Tower owners and operators.
- 35 • Aircraft manufacturers, repairers and operators.
- Non-destructive evaluation firms and equipment manufacturers.

- R&D companies and laboratories.
- Instrument and sensor manufacturers.
- Sports equipment and facilities manufacturers and operators.
- 5 • Mine operators.
- Owners, operators and insurers of marine vessels.
- Quality Assurance and safety firms.
- Building management firms.
- Industrial equipment operators and manufacturers.
- 10 • Nuclear power plant manufacturers, owners and operators.
- Telecommunications firms or operators.
- Any application requiring the detection, measurement and location of a disturbance to an optical fibre cable.

15

The claimed invention overcomes the disadvantages and limitations of many existing fibre optic distributed sensing techniques. Furthermore, it is capable of detecting and locating dynamic and transient events and it

20 is less complex and lower cost than most other fibre optic distributed sensors capable of locating disturbances. Such a system would offer lower cost and increased operational and safety advantages over existing technologies and has the potential for short and long term

25 installation monitoring in plant and ecological environments.

Since modifications within the spirit and scope of the invention may readily be effected by persons skilled

30 within the art, it is to be understood that this invention is not limited to the particular embodiments described by way of example hereinabove.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. An apparatus for monitoring a structure and for locating the position of an event including;
5 a light source;
a waveguide for receiving light from the light source so that the light is caused to propagate in both directions along the waveguide to thereby provide counter-propagating optical signals in the waveguide, the
10 waveguide being capable of having the counter-propagating optical signals or some characteristic of the signals modified or effected by an external parameter caused by or indicative of the event to provide modified counter-propagating optical signals; and
15 detector means for detecting the modified counter-propagating optical signals effected by the parameter and for determining the time delay or difference between the modified counter-propagating optical signals in order to determine the location of the event.
20
2. The apparatus of claim 1 wherein the waveguide is a silica waveguide.
3. The apparatus of claim 1 or 2 wherein light
25 source is for launching simultaneously into opposite ends of the waveguide.
4. The apparatus of any one of claims 1 to 3 wherein the light source is a single light source.
30
5. The apparatus of any one of claim 1 to 4 wherein the waveguide is one or more optical fibres which forms an event sensitive optical fibre.
- 35 6. The apparatus of any one of claims 1 to 5 wherein further silica waveguides are connected to the said waveguide at either or both ends in order to add

additional delay between the transmissive counter-propagating signals and to provide insensitive lead waveguides.

5 7. The apparatus of any one of claims 1 to 6 wherein the detector means comprises:

first and second photodetectors for simultaneously receiving the radiation from the counter-propagating signals in the waveguide; and

10 processing means for receiving signals from the first and second photodetectors for determining the time delay or difference between the signals effected from the same disturbance and therefore determining the location of the sensed event.

15

8. The apparatus of claim 7 wherein a waveguide coupler or set of couplers is arranged between the light source and the photodetectors and the silica waveguide so that the light can be simultaneously transmitted from the
20 light source to both ends of the silica waveguide and the detector means also being connected to the coupler or couplers so that the counter-propagating transmissive radiation can be directed via the coupler or couplers from the silica waveguide to the detector means.

25

9. The apparatus of any one of claims 1 to 8 wherein the waveguide is for connection to the structure to monitor the structure.

30 10. The apparatus of anyone of claims 1 to 8 wherein the structure comprises the waveguide for transmitting data along the waveguide from one place to another and the waveguide simultaneously receiving the light from the light source to provide the counter-propagating optical
35 signals so as to enable the integrity and security of the waveguide to be monitored.

11. The apparatus according to any one of claims 1 to 10 wherein the detector also identifies or quantifies the parameter from the modified counter-propagating optical signals.

5

12. The apparatus of any one of claims 1 to 11 wherein waveguide is arranged in a loop configuration so that light can be simultaneously launched into both ends of the waveguide from a single light source.

10

13. The method of claim 11 wherein data signals are supplied to the waveguide so that the waveguide acts as a communication link for transmission of data from one place to another and the launching of the counter-propagating optical signals in the waveguide enables the integrity and security of the waveguide to be monitored.

15

14. The method according to claim 11 wherein the waveguide is applied to a structure to monitor the structure.

20

15. A method for monitoring a structure to locate the position of an event, including the steps of;
launching light into a waveguide so that the light is caused to propagate in both directions along the waveguide to thereby provide counter-propagating optical signals in the waveguide, the waveguide being capable of having the counter-propagating optical signals or some characteristic of the signals modified or effected by an external parameter caused by the event, to provide modified counter-propagating optical signals; and
detecting the modified counter-propagating optical signals effected by the parameter and for determining the time delay or difference between the modified signals in order to determine the location of the event.

25

30

35

16. The method of claim 13 wherein the light is launched into both ends of the waveguide to provide the counter-propagating signals.

5 17. The method of claim 13 wherein the light is launched into both ends of the waveguide from a single light source.

18. The method according to claim 11 wherein the
10 parameter is quantified and/or identified from the modified signals.

19. A waveguide transmissive counter-propagating
signal method for locating events in optical waveguides,
15 which may include:

providing a sensing optical fibre formed from a waveguide material designed to simultaneously transmit counter-propagating optical signals;

providing a detector for locating events in
20 optical waveguides, designed to optimise the sensor sensitivity and detection capabilities;

providing a lead optical fibre formed from a waveguide material which acts as an insensitive light guide between the sensing fibre and detector;

25 providing a lead optical fibre formed from a waveguide material which acts as an insensitive light guide between the sensing fibre and a light source;

fusion splicing, or otherwise connecting, the sensor waveguide and the lead optical fibres so that cores
30 of the waveguides are aligned and remain fixed at the splice;

delivering the counter-propagating signals from the waveguide sensor, via the lead optical fibres, to the detector so the time delay or difference between the
35 signals may be measured and utilised to determine the location of the sensed event; and

registering any changes in the waveguide sensor optical signals so that the sensed parameter may be quantified and/or identified.

5 20. An apparatus for monitoring an optic fibre communication link into which data signals are launched and from which the data signals are received, and for locating the position of a disturbance to the link including;

10 a light source for launching light into the link so that the light is caused to propagate in both directions along the link to thereby provide counter-propagating optical signals in the link, the link being capable of having the counter-propagating optical signals
15 or some characteristic of the signals modified or effected by the disturbance to provide modified counter-propagating optical signals; and

detector means for detecting the modified counter-propagating optical signals and for determining
20 the time delay or difference between the modified counter-propagating optical signals in order to determine the location of the disturbance.

21. The apparatus of claim 20 wherein the link is a
25 silica waveguide.

22. The apparatus of claim 20 or 21 wherein the light source is for launching simultaneously into opposite ends of the link.

30 23. The apparatus of any one of claims 20 to 22 wherein the light source is a single light source.

24. The apparatus of any one of claims 20 to 23
35 wherein the detector means comprises:

first and second photodetectors for simultaneously receiving the light from the counter-propagating signals in the link; and

5 processing means for receiving signals from the first and second photodetectors for determining the time delay or difference between the signals effected from the same disturbance and therefore determining the location of the disturbance.

10 25. The apparatus of claim 24 wherein a waveguide coupler or set of couplers is arranged between the light source and the photodetectors and the link so that the light can be simultaneously transmitted from the light source to both ends of the link and the detector means
15 also being connected to the coupler or couplers so that the counter-propagating signals can be directed via the coupler or couplers from the link to the detector means.

20 26. A method for monitoring an optical fibre communication link into which data signals are launched and from which the data signals are received, to locate the position of a disturbance to the link, including the steps of;

25 launching light into the link so that the light is caused to propagate in both directions along the link to thereby provide counter-propagating optical signals in the link, the link being capable of having the counter-propagating optical signals or some characteristic of the signals modified or effected by the disturbance to provide
30 modified counter-propagating optical signals; and

detecting the modified counter-propagating optical signals effected by the disturbance and for determining the time delay or difference between the modified signals in order to determine the location of the
35 disturbance.

27. The method of claim 26 wherein the light is launched into both ends of the link to provide the counter-propagating signals.

- 5 28. The method of claim 26 wherein the light is launched into both ends of the link from a single light source.

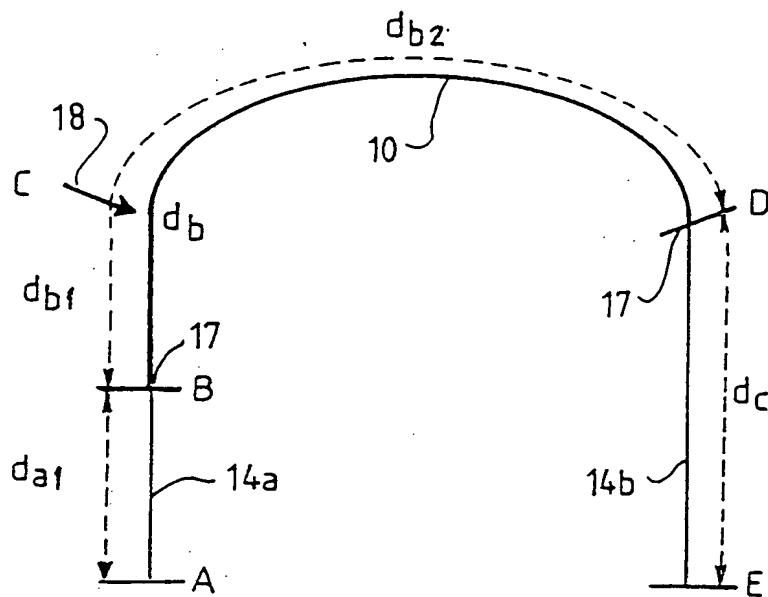


FIG. 1.



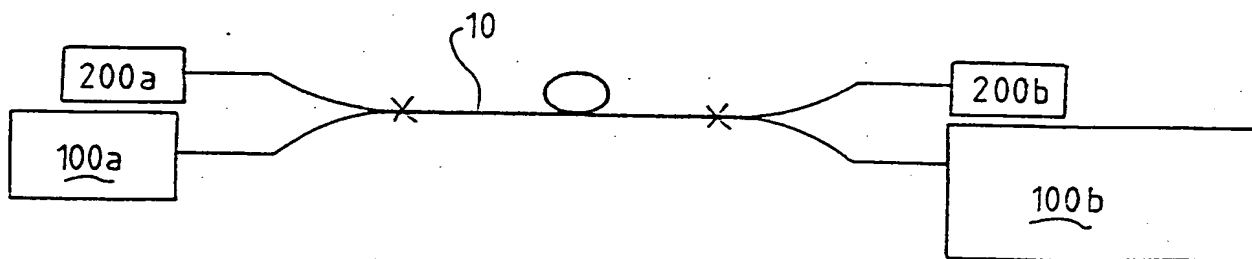


FIG. 4.

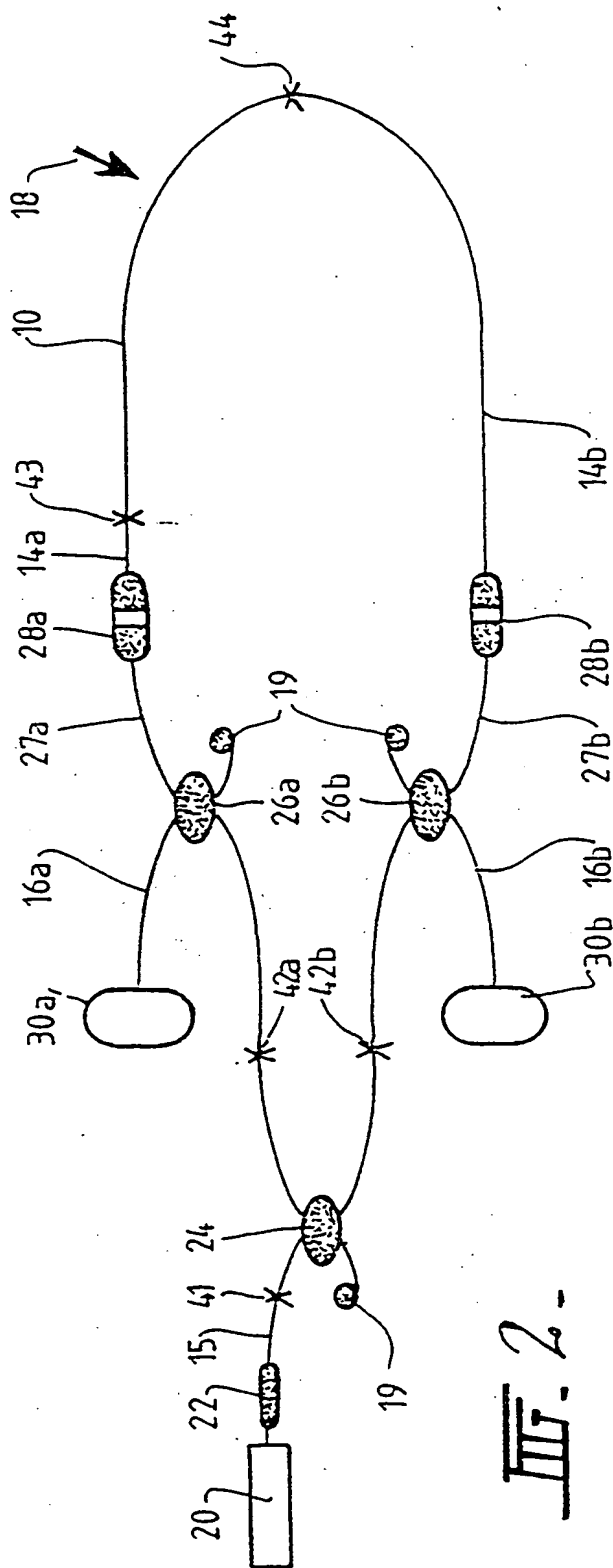

III. 2.

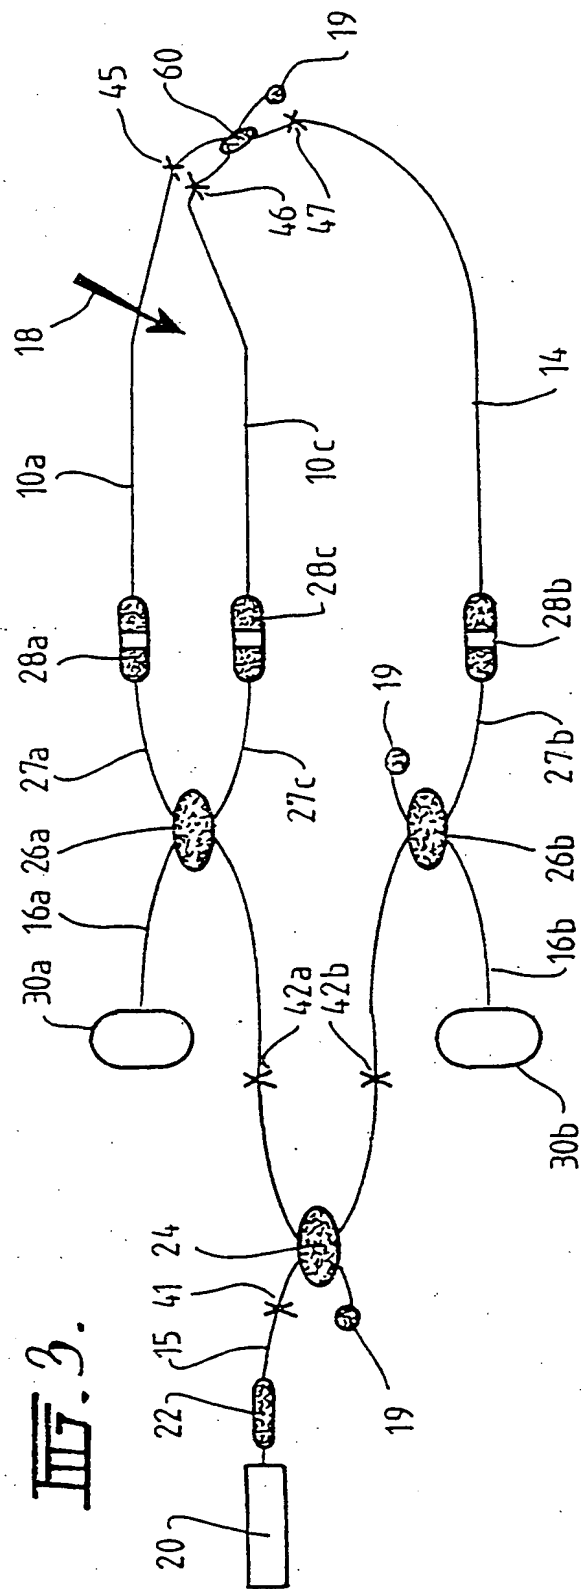

III. 3.

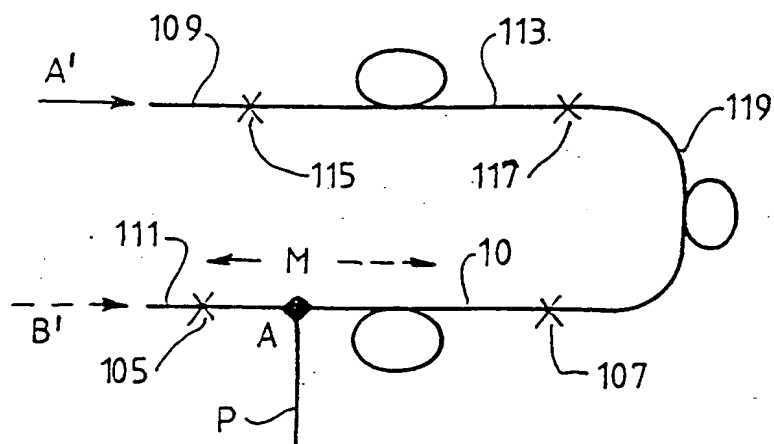


FIG. 5.

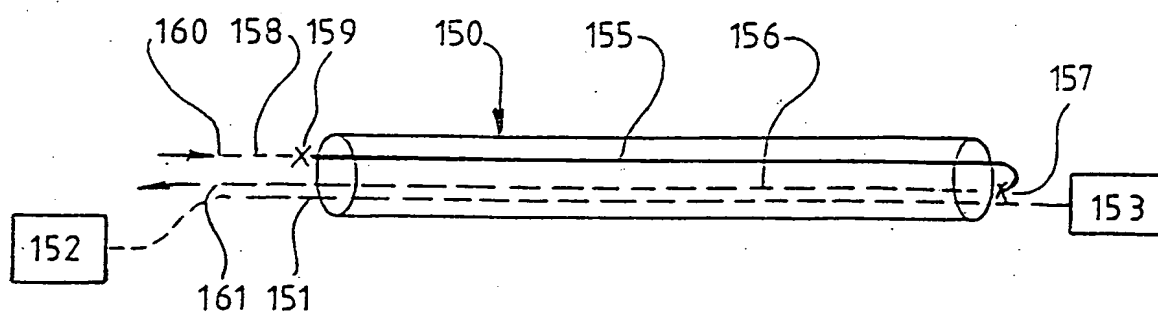


FIG. 8.

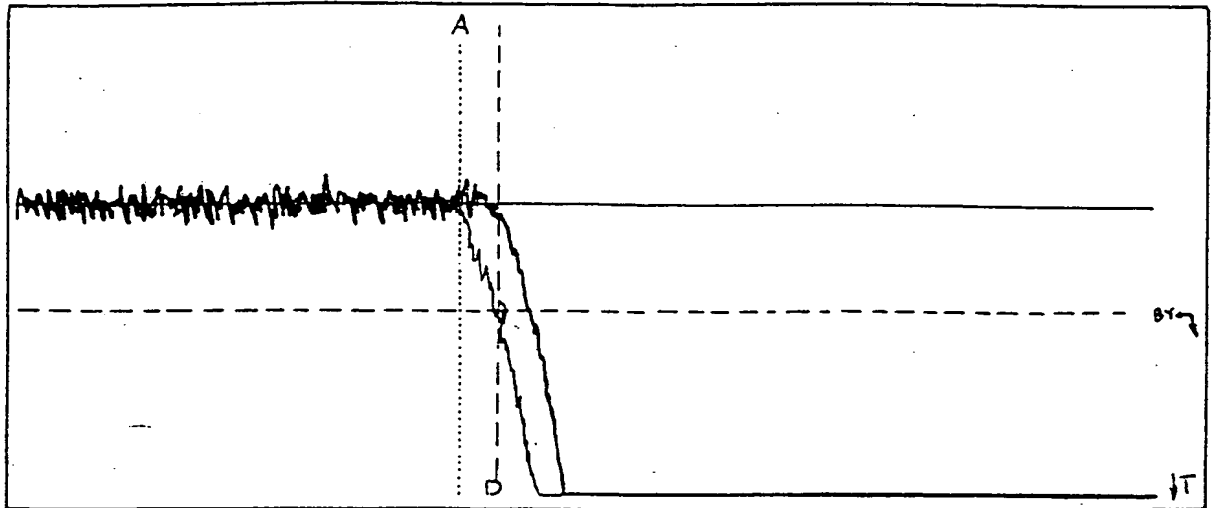


FIG. 6.

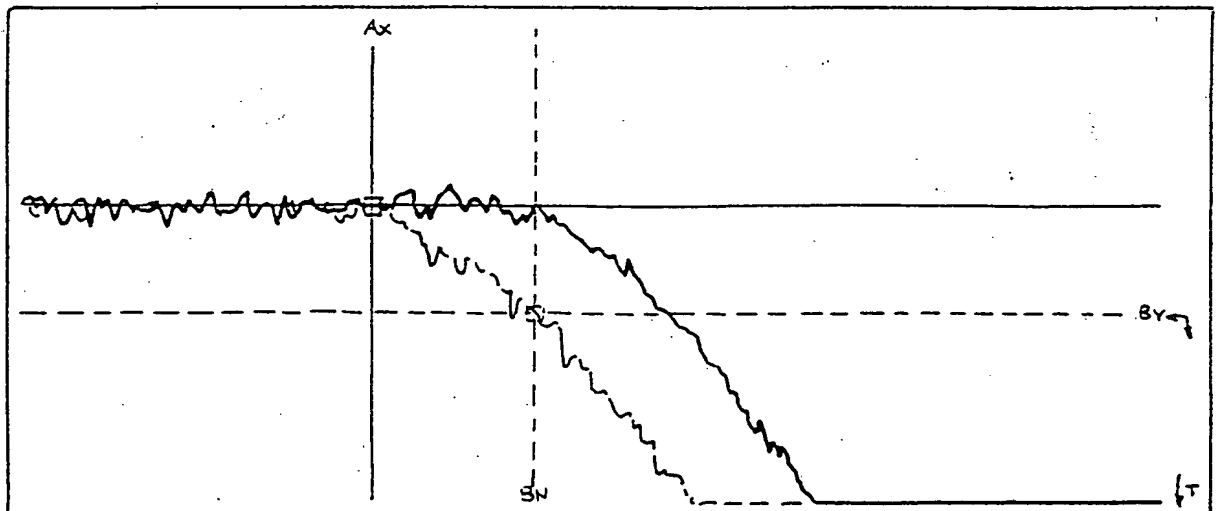


FIG. 7.

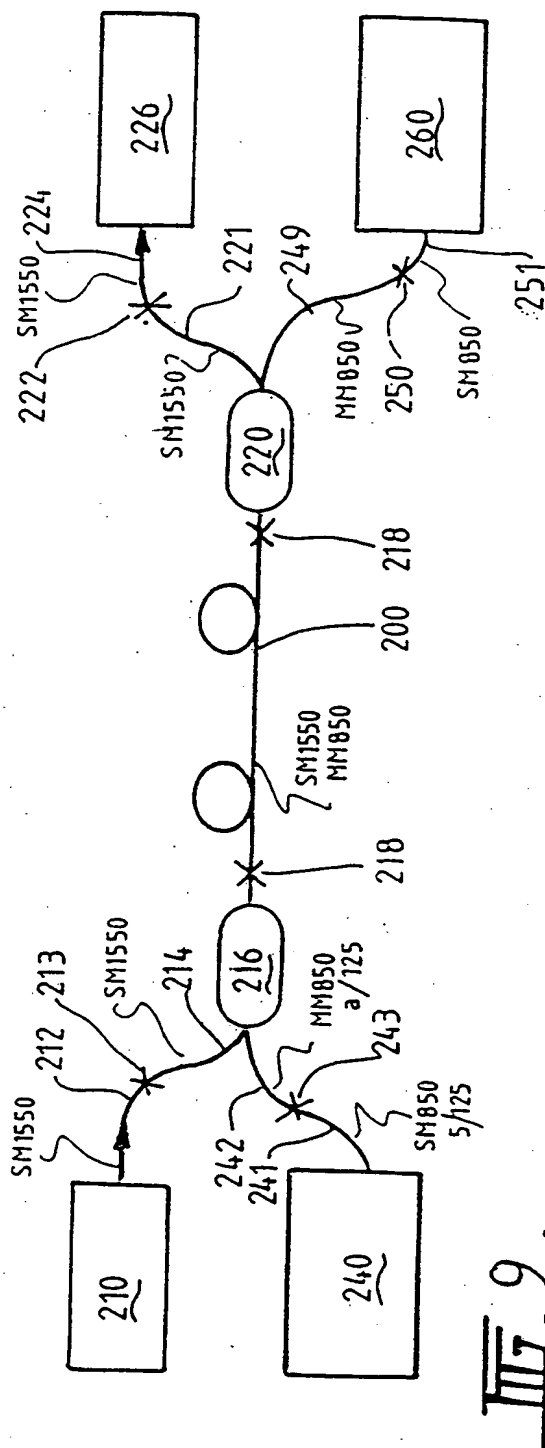


Fig. 9.

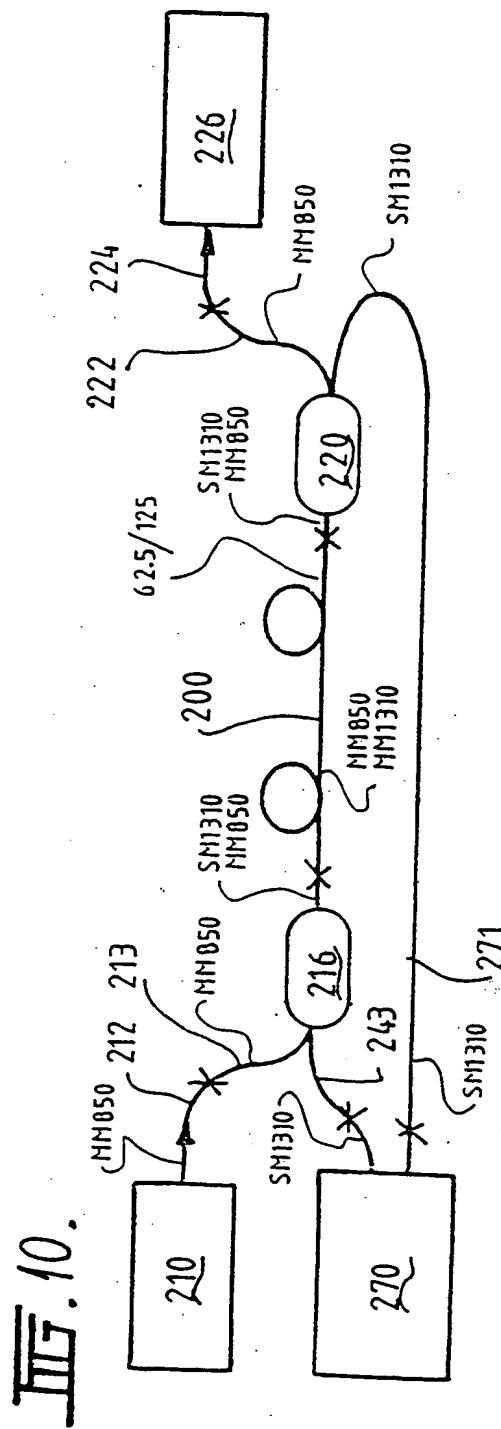


Fig. 10.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU 99/01028

A. CLASSIFICATION OF SUBJECT MATTER		
Int Cl ⁶ : G01N 21/63, G01M 11/00		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) G01/-		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) DWPI, JAPIO		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	Patent Abstracts of Japan, P-421, page 165, JP 60-169775 A (SUMITOMO DENKI KOGYO K.K.) 3 September 1985 Abstract	1,3-5,7-12,15-18 2,6,13,14,19
X Y	Patent Abstract of Japan, P-103, page 109, JP 56-150323 A (NIPPON DENKI K.K.) 20 November 1981 Abstract	1,3,5-11,13-16,18-20, 22,24-27 2,4,12,17,21,23,28
Y	Patent Abstract of Japan, P-1693, page 100, JP 05-297052 A (FURUKAWA ELECTRIC CO LTD) 12 November 1993 Abstract	1-28
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex		
<p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>		
Date of the actual completion of the international search 20 January 2000		Date of mailing of the international search report 21 JAN 2000
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaustalia.gov.au Facsimile No. (02) 6285 3929		Authorized officer MANO RAMACHANDRAN Telephone No.: (02) 6283 2166

INTERNATIONAL SEARCH REPORT

International application No. 3

PCT/AU 99/01028

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	Patent Abstract of Japan, P-361, page 118, JP 60-14137 A (NIPPON DENKI K.K.) 24 January 1985 Abstract	1-28
Y	Derwent Abstract Accession No. 98-372020/32, Class X12, JP 10-148654 A (DENRYOKU CHUO KENKYUSHO) 2 June 1998 Abstract	1-28
Y	Derwent Abstract Accession No. 99-013451/02, Class V07, JP 10-281923 A (MITSUBISHI JUKOGYO K.K.) 23 October 1998 Abstract	1-28
A	US 5627637 A (KAPTEYN) 6 May 1997 Abstract	
A	US 5356220 A (IIDA et al) 18 October 1994 Abstract	
A	US 5026141 A (GRIFFITHS) 25 June 1991 Abstract	

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☒ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.